

IB04/51829



INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

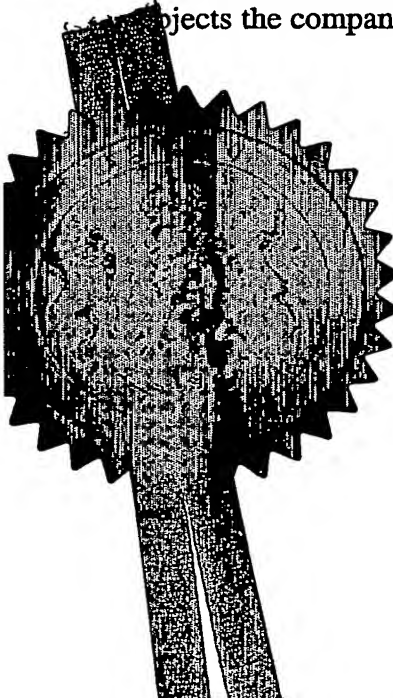

*P. McHoney*

Signed

Dated 4 October 2004

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**BEST AVAILABLE COPY**

Request for grant of a patent

29 SEP 2003



1/77

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference PJP/44338GB1

2. Patent application number 0322774.1 ✓

3. Full name, address and post code of the or each applicant  
Nokia Corporation  
Keilalahdentie 4  
Espoo 02150  
Finland

Patents ADP number 07652217001  
If the applicant is a corporate body, give the country/state of its incorporation Finland

4. Title of the invention Extension Device

5. Name of your agent VENNER, SHIPLEY & CO

"Address for service" in the United Kingdom to which all correspondence should be sent  
20 LITTLE BRITAIN  
LONDON  
EC1A 7DH

Patents ADP 1669004 ✓

6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and the or each application number	Country	Priority application number	Date of filing
----	---	---------	-----------------------------	----------------

7.	If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application	Number of earlier application	Date of Filing
----	--	-------------------------------	----------------

Patents Form 1/77

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'YES' if:  
a) any applicant in 3. above is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body)
- YES

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 21 /

Claim(s) 3 /

Abstract 1 /

Drawing(s) 7+7 /

*JML*

10. If you are also filing any of the following state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 3 /

Request for preliminary examination and search (Patents Form 9/77) 1 /

Request for substantive examination (Patents Form 10/77)

Any other documents

11.

I/We request the grant of a patent on the basis of this application.

Signature

*Venner, Phillips & Co*

Date

29 September 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Pawel Piotrowicz  
020 7600 4212

## Extension device

### Description

The present invention relates to an extension device for delivering a digital  
5 broadcast to a mobile terminal.

Digital broadcasting networks can be used to deliver enhanced services to users  
having digital broadcasting receivers. Examples of digital broadcasting networks  
include a Digital Video Broadcasting (DVB) network, a Digital Audio Broadcasting  
10 (DAB) network, an Advanced Television Systems Committee (ATSC) network and  
an Integrated Service Digital Broadcasting (ISDB) network.

It is proposed to provide Internet Protocol Datacast (IPDC) services as part of a  
terrestrial Digital Video Broadcasting (DVB-T) system or handheld DVB (DVB-H)  
15 system. IPDC permits data to be transmitted at high transfer rates to many users  
simultaneously and so can be used to stream video content and transfer data files.

It is also proposed to incorporate a DVB receiver into a conventional mobile  
telephone handset or personal digital assistant (PDA). This has the advantage that  
20 it allows a user to download large amounts of data quickly using IPDC, data which  
ordinarily would take too long and be prohibitively expensive to transfer using a  
conventional mobile handset and conventional public land mobile networks.

Initially, provision of DVB transmitters and implementation of IPDC is unlikely to  
25 be widespread. Therefore, service coverage is likely to be limited. Therefore, it is  
desirable to extend service coverage wherever possible. Furthermore, even when  
further transmitters are installed and IPDC becomes more widely available, it is still  
desirable to maximise service coverage.

30 Service coverage is often restricted because receivers are taken indoors. Walls and  
other parts of a building attenuate transmitted signals. Thus, although service  
coverage may be adequate outdoors, it may be insufficient indoors even though the

receiver has moved just a few meters. Additionally, service coverage may be impeded by other buildings.

5 Extension sets are known. EP-A-1076376 describes an extension set for a DVB-T receiver in which the extension set and receiver are connected by a wired link. This has the disadvantage that it restricts mobility of the mobile terminal. WO-A-02089361 also describes an extension set for a DVB-T receiver in which the extension set re-emits a received signal. However, this has a drawback of being indiscriminate. Thus, a receiver may receive signals from a number of extension  
10 sets and the signals may interfere. DE-A-10123556 describes a mobile terminal holder in which the holder transmits a signal to the mobile telephone. However, the signal can be significantly attenuated during transmission.

The present invention seeks to ameliorate at least some these problems.

15

According to a first aspect of the present invention there is provided an extension device for delivering digital broadcasts to a mobile terminal, the device comprising means for receiving a signal carrying the digital broadcast received via an antenna; and a loop or coil configured to couple inductively with a corresponding loop or  
20 coil included in the mobile terminal so as to transmit the signal to the mobile terminal.

The device may further comprise means for amplifying the signal. The amplifying means may be powered by the mobile terminal. The amplifying means may be  
25 controlled by said mobile terminal. The amplifying means may intermittently operate under the control of the mobile terminal. This can have the advantage of reducing power consumption and minimising transmission of signals when not required.

30 The device may comprise means for detecting the mobile terminal and means for controlling operation of said amplifying means in dependence upon the position of the mobile terminal. The detecting device may comprise a switch to determine whether said mobile terminal is attached to the extension device. The term

“attached” means placed in, on or against. The detecting device may comprise means for sensing whether the mobile terminal is located within a predetermined distance of said extension device. The controlling means may cause the amplifying means to reduce gain or to be by-passed when the mobile terminal is in a given position, such as when the mobile is attached or is within the predetermined range. This can help to limit the power delivered to the mobile terminal, which can help to prevent saturation of amplifiers and/or other circuits in the mobile terminal.

The device may further comprise an antenna for receiving an amplified signal from the amplifying means and radiatively transmitting the amplified signal to the mobile terminal, wherein said controlling means causes the signal to be routed to the loop or coil when the mobile terminal is in a given position, such as when the mobile is attached or is within the predetermined range and to be routed to the amplifying means when not. This can help to deliver the signal in a suitable way.

The extension device may comprise means for filtering the signal from at least one other signal.

The extension device may comprise means for receiving power from an external source and means for delivering power to the mobile terminal to permit recharging of a rechargeable battery included in the mobile terminal.

The extension device may be adapted to be placed on a piece of furniture, such as desk or table. For example, the extension device may be configured as a desk stand. Thus, the extension device can be put at a level and/or in a place where the mobile terminal is likely to be used or stored.

The loop or coil may be a loop and the loop may be arranged substantially around a perimeter of a face of the device. The loop or coil may have an area of between 10 and 50 cm<sup>2</sup>.

The device may further comprise an antenna mounted on a roof or to an externally facing side of an external wall of a building.

According to a second aspect of the present invention there is provided apparatus for receiving a time-sliced digital broadcast comprising a mobile terminal including a loop or coil and an extension device comprising means for receiving a signal  
5 carrying the digital broadcast received via an antenna and a loop or coil configured to couple inductively with the corresponding loop or coil included in a mobile terminal so as to transmit the signal to the mobile terminal.

The mobile terminal may cause the amplifying means to operate when reception of a  
10 time slice is expected.

According to a third aspect of the present invention there is also provided a method of delivering a digital broadcast to a mobile terminal, the method comprising receiving a signal carrying a digital broadcast via an antenna and providing said  
15 signal to a loop or coil configured to couple inductively with a corresponding loop or coil included in the mobile terminal so as to transmit the signal to the mobile terminal.

Embodiments of the present invention will now be described, by way of example,  
20 with reference to the accompanying drawings in which:

Figure 1 shows an example of an environment in which an extension device according to the present invention can be used;

Figure 2 is a schematic diagram of a mobile terminal for use with an extension device according to one embodiment of the present invention;

25 Figure 3 is a schematic diagram of a first embodiment of an extension device according to the present invention;

Figure 4 is a perspective view of an extension device according to various embodiments of the present invention and a mobile terminal;

Figure 5 is a schematic diagram of a second embodiment of an extension device  
30 according to the present invention;

Figure 6 is a schematic diagram of a third embodiment of an extension device according to the present invention;

Figure 7 is a schematic diagram of a fourth embodiment of an extension device according to the present invention;

Figure 8 is a schematic diagram of a fifth embodiment of an extension device according to the present invention;

5 Figure 9 is a schematic diagram of a sixth embodiment of an extension device according to the present invention;

Figure 10 is a schematic diagram of a seventh embodiment of an extension device according to the present invention; and

10 Figure 11 is a schematic diagram of an eighth embodiment of an extension device according to the present invention.

#### *Operating environment 1*

Referring to Figure 1, an environment 1 in which an extension device 2, 102, 202, 302, 402, 502, 602, 702 according to the present invention can be used is shown. In  
15 this example, the environment 1 is a two-storey house having a roof 3, external walls 4<sub>1</sub>, 4<sub>2</sub>, internal walls (not shown) and floors (not shown). However, the environment may be any domestic building of any design and having any number of floors, or a part of a domestic building, such as a room, flat or apartment. The environment may be any sort of commercial or industrial premises, such as an office  
20 or factory. The environment may be located underground.

For the purposes of illustration, a part of an external wall 4<sub>1</sub> is shown removed to reveal the inside of the house 1. Inside the house 1, the extension device 2, 102, 202, 302, 402, 502, 602, 702 is conveniently placed on a piece of furniture 5, such as  
25 a desk or table, and is used to deliver a digital broadcast to a mobile terminal 6. A signal 7 carrying the digital broadcast is received via an antenna 8, which is preferably mounted on the roof 3. Alternatively, the antenna 8 may be mounted to an external wall 4<sub>1</sub>, 4<sub>2</sub>. The antenna 8 is connected to the extension device 2, 102, 202, 302, 402, 502, 602, 702 by a cable 9. Preferably, the cable is in the form of a  
30 co-axial cable. However, the signal may be converted into an optical signal which may be transmitted through fibre or through air.



*Mobile terminal 6*

Referring to Figure 2, the mobile terminal 6 is in one embodiment of the invention in the form of a mobile communications device such as a mobile telephone handset for use in both a communications network (not shown) and a digital broadcasting  
5 network (not shown). Preferably, the communications network is a second generation (2G) communications network, such as a GSM network. However, the communications network may be any mobile phone network, for example a 3G network, such as UMTS.

10 The mobile telephone handset 6 comprises an antenna 10<sub>1</sub> for sending and receiving signals via the communications network and receiving signals from the broadcasting network, transceiver circuit 11 for, *inter alia*, modulating/de-modulating and amplifying signals from the communications network (not shown), processor 12 for, *inter alia*, coding/decoding signals, baseband processing and other signal processing  
15 and managing operation of the mobile terminal 6, keypad 13 for providing user input, display 14 for providing output, storage 15, a smart card reader 16, smart card 17 received in the smart card reader 16, a coder/decoder (codec) 18, a speaker 19 with corresponding amplifier 20 and a microphone 21 with a corresponding pre-amplifier 22, a connector 23 for a hands free kit (not shown), a battery 24, a switch  
20 25 and a connector 26 for a mains supply (not shown) or a mains-powered supply (not shown). The processor 12 can be used to open and close switch 25. The processor can also be used to control the extension device 2, 102, 202, 302, 402, 502, 602, 702 preferably via connector 26.

25 The mobile terminal 6 also comprises means 27 for receiving a signal using inductive coupling, an optional second antenna 10<sub>2</sub> and a receiver circuit 28 for, *inter alia*, de-modulating and amplifying signals from the digital broadcasting network (not shown) received via antenna 10<sub>2</sub> or inductive coupling receiving means 27. The inductive coupling receiving means 27 takes the form of a loop or a coil. The loop  
30 27 may run around a perimeter of a face of the device 6 and have an area of the order between 0.1 to 10 cm<sup>2</sup>. Preferably, the loop 27 has an area of between 10 and 50 cm<sup>2</sup>. A coil comprising a number of turns may be used.

The mobile terminal 6 also comprises a Bluetooth™ transceiver 29 for establishing a personal area network (PAN) with one or more other Bluetooth™ transceivers, such as Bluetooth™ transceiver 649 (Figure 10), thereby allowing the mobile terminal 6 to exchange signals with other Bluetooth-enabled devices, such as extension device 602 (Figure 10).

The receiver 28 is in the form of an Internet Protocol Datacasting (IPDC) receiver. Preferably, the digital broadcasting network is a terrestrial Digital Video Broadcasting (DVB-T) network or a handheld DVB (DVB-H) network. However, other digital broadcasting networks may be used such as a Digital Audio Broadcasting (DAB) network, an Advanced Television Systems Committee (ATSC) network or an Integrated Service Digital Broadcasting (ISDB) network. To receive signals from the digital broadcasting network (not shown), the antenna 10<sub>2</sub> and receiver circuit 28 are adapted to receive ultra high frequency (UHF) signals, for example lying in the range 470 to 862 MHz.

It will be appreciated that loop 27 may be used as a receiving antenna instead of antenna 10<sub>2</sub>.

As will be explained in more detail later, the inductive coupling means 27 can be used to receive a signal carrying a digital broadcast from the digital broadcasting network (not shown) received via antenna 8 (Figure 1) and delivered by an extension device 2, 102, 202, 302, 402, 502, 602, 702 (Figure 1).

#### *First embodiment*

Referring to Figure 3, a first embodiment of an extension device 2 according to the present invention is shown.

The extension device 2 comprises means 30 for receiving a signal received via an antenna which is in the form of a connector, also referred to as a "terminal", for receiving a corresponding connector (not shown) at the end of the cable 9 (Figure 1) and means 31 for transmitting the signal to the mobile terminal 6 by inductive coupling which is in the form of loop. The loop 31 may have an area of the order

between 0.1 to 10 cm<sup>2</sup>. Preferably, the loop 31 has an area of between 10 and 50 cm<sup>2</sup>. Preferably, the loop 31 is impedance matched to the cable 9 (Figure 1) connected to the connector 30.

5 In use, the mobile terminal 6 is preferably located in the near field of the loop 31, in other words the mobile terminal is placed no more than a few centimetres away from the loop 31 and the loops 27, 31 are inductively coupled. The mobile terminal 6 and the extension device 2 may be separated by greater distances, but this leads to significant signal attenuation.

10

Referring to Figure 4, the extension device 2 is preferably arranged as a cradle for receiving mobile terminal 6. The extension device 2 is preferably arranged such that when the mobile terminal 6 is received in or placed on the extension device 2, the loop 27 of the mobile terminal 6 is placed against or within a few millimetres of the  
15 loop 31 of the extension device 2. Preferably, planes of the loops 27, 31 are substantially parallel. Preferably, the loops 27, 31 are co-axial.

Referring also to Figures 1 and 2, a signal 7 is received by the antenna 8, fed through cable 9 and supplied to the extension device 2 via the connector 30. The  
20 signal 7 is fed through the loop 31.

A corresponding signal is induced in the loop 27 of the mobile terminal 6 and is passed into the receiving circuit 28 (Figure 2) for amplifying and demodulating and thereafter baseband processing, channel decoding, de-multiplexing and further  
25 processing by processor 12 (Figure 2).

In this way, the mobile terminal 6, which might otherwise not be able to receive the signal 7 inside the house 1, can now do so with the help of the extension device 2.

30 In this embodiment of the present invention, amplifying means is not used because antenna 8 (Figure 1) provides a gain of up to 10 dB and even up to 20 dB. A signal booster (not shown), which is also known as a "mast amplifier", may also be provided.

*Second embodiment*

Referring to Figure 5, a second embodiment of an extension device 102 according to the present invention is shown.

5

The extension device 102 comprises means 130 for receiving a signal received via an antenna which is in the form of a connector, also referred to as a "terminal", for receiving a corresponding connector (not shown) at the end of the cable 9 (Figure 1), means 132 for amplifying the signal in the form of a wideband UHF low noise amplifier (LNA) and means 131 for transmitting the amplified signal to the mobile terminal 6 by inductive coupling which is in the form of loop. The loop 131 may have an area of the order between 0.1 to 10 cm<sup>2</sup>. Preferably, the loop 131 has an area of between 10 and 50 cm<sup>2</sup>. A battery 133 powers the LNA 132. Preferably, the LNA 132 is impedance matched to the cable 9 (Figure 1) connected to the connector 130 and also impedance matched to the loop 131.

15

Preferably, the extension device 102 is arranged as a cradle for receiving mobile terminal 6 as shown in Figure 4.

20 In use, the extension device 102 operates substantially similar to extension device 2 described earlier. However, the signal 7 is amplified by the LNA 132 so as to compensate for signal attenuation during transmission of the signal to the mobile terminal 6 (Figure 1). The amplified signal is fed through the loop 131.

25 In this way, the mobile terminal 6, which might otherwise not be able to receive the signal 7 inside the house 1, can now do so with the help of the extension device 102.

30 To determine whether the extension device 102 will help and/or to determine a minimum gain of the amplifier 132, a gain necessary to provide adequate indoor reception may be found by routine experiment. For example, signal strength at the antenna 8 may be measured or estimated for a typical location, such a suburb of a city. Gain of the antenna 8 may be measured or estimated. For example, a UHF

antenna may be estimated as providing a gain of up to 10 dB and even up to 20 dB. Attenuation due to signal transmission by inductive coupling may be measured or estimated. Other sources of gain and loss may be taken into account. Thus, a gain (or loss) can be determined.

5

*Third embodiment*

Referring to Figure 6, a third embodiment of an extension device 202 according to the present invention is shown.

10 The extension device 202 comprises means 230 for receiving a signal received via an antenna, which is in the form of a connector for receiving a corresponding connector (not shown) at the end of the cable 9 (Figure 1), means 234 for power  
amplifying the signal in the form of a wideband UHF power amplifier and means  
231 for transmitting the amplified signal to the mobile terminal by inductive  
15 coupling in the form of loop. Preferably, the power amplifier 234 is impedance  
matched to the cable 9 (Figure 1) connected to the connector 230 and also  
impedance matched to the loop 231. Instead of being connected to the loop 231,  
the power amplifier 234 may be connected to an antenna (not shown), such as a  
radiating antenna. Furthermore, a switching means (not shown) may be provided to  
20 switch the output of the connector 230 either to the loop 231 or to power amplifier  
234 for transmission via the radiating antenna.

The extension device 202 also comprises means 235 for receiving power from an  
external power source (not shown). Alternatively or additionally, the extension  
25 device 202 may comprise a battery. Power lines are shown as short-dashed lines.

The extension device 202 may also comprise means 236 for controlling operation of  
the amplifying means for example in the form of a microcontroller and means 237  
for detecting whether the mobile terminal 6 is attached to or located within a  
30 predetermined distance of the extension device 202, such as a switch or electrical  
contact. Control and/or signalling lines are shown as long-dashed lines. The  
controlling means 236 may disconnect power or reduce gain of the power amplifier,  
if the detecting means 237 senses that the mobile terminal 6 is attached to or is

close to the extension device 202, thereby limiting the power delivered to the mobile terminal 6 and preventing saturation of amplifiers and/or other circuits within the mobile terminal 6.

- 5 Preferably, the extension device 202 is arranged as a cradle for receiving mobile terminal 6 as shown in Figure 4.

In use, the extension device 202 operates substantially similar to extension device 102 described earlier.

10

However, the extension device 202 may additionally limit power of the power amplifier 234 if the mobile terminal 6 is attached to or brought close to the extension device 202. For example, the extension device 202 may provide a cradle (Figure 4) or holder and the mobile terminal 6 is placed on or in the cradle or holder, thus closing the switch 237.

15

An advantage of using a power amplifier 234 is that a higher power can be delivered. For example, transmitted signal power can lie in a range between 0.1 mW and 10 mW. Alternatively, transmitted signal powers of 10 mW or greater can be used.

20

#### *Fourth embodiment*

Referring to Figure 7, a fourth embodiment of an extension device 302 according to the present invention is shown.

25

The extension device 302 comprises means 330 for receiving a signal received via an antenna, which is in the form of a connector for receiving a corresponding connector (not shown) at the end of the cable 9 (Figure 1), means 332 for amplifying the signal in the form of a wideband UHF low noise amplifier (LNA) and means 331 for transmitting the amplified signal to the mobile terminal by inductive coupling, which is in the form of loop. Preferably, the LNA 332 is impedance matched to the cable 9 (Figure 1) connected to the connector 330 and also impedance matched to the loop 331.

30

The extension device 302 also comprises means 339 for receiving power from an external power source, such as e.g. mobile terminal 6. The power receiving means 339 is in one embodiment of the invention in the form of a power supply connector and is configured to be attached to the power supply connector 26 of the mobile  
5 terminal 6 (Figure 2). The extension device 302 also comprises means 338 for controlling power supply to the LNA 332, for example in the form of a switch. Power lines are shown as short dashed lines and control/signalling lines are shown as long dashed lines.

10

Referring also to Figure 4, the extension device 302 is preferably arranged as a cradle for receiving mobile terminal 6. When the mobile terminal 6 is placed in the cradle 302, the power supply connectors 26, 339 are connected, thereby enabling processor 12 (Figure 2) to control supply of power to the extension device using  
15 switch 25 (Figure 2) and/or switch 338.

20

In use, the extension device 302 operates substantially similar to extension device 102 described earlier. However, the extension device 302 may be selectively powered by the mobile terminal 6.

25

This is particularly useful for receiving Internet Protocol Datacasting (IPDC) service. To reduce power consumption of mobile DVB receivers, such as mobile terminal 6, IPDC services may be transmitted in bursts preferably using the entire channel bandwidth or most of it. This is known as "time slicing". Time slicing  
parameters such as burst transmission time, burst duration and transmission  
frequency (or channel) are signalled to the mobile terminal 6. With this  
information, the mobile DVB receiver can be switched off between bursts.

30

Selectively controlling power to the extension device 302 is also useful when generally receiving DVB transmissions (which may or may not be transmitted in time-sliced bursts). The mobile DVB receiver can be switched on to receive content, such a video stream or data file, transmitted at a known time and thereafter

switched off. The content can be stored in storage 15 (Figure 2) and consumed or used at a later time.

Thus, when the mobile terminal 6 is connected to the extension device 302, the  
5 mobile terminal 6 can selectively supply power to the extension device 302 to enable reception of a burst and/or a content transmission slot.

*Fifth embodiment*

Referring to Figure 8, a fifth embodiment of an extension device 402 according to  
10 the present invention is shown.

The extension device 402 is similar to the extension device 302 described earlier differing in that it can power itself using a power source other than mobile terminal 6 and also in that it can provide a battery charging facility to the mobile terminal 6.

15 The extension device 402 comprises means 430 for receiving a signal received via an antenna, which is in the form of a connector for receiving a corresponding connector (not shown) at the end of the cable 9 (Figure 1), means 432 for amplifying the signal in the form of a wideband UHF low noise amplifier (LNA) and means 431 for transmitting the amplified signal to the mobile terminal by  
20 inductive coupling in the form of loop. Preferably, the LNA 432 is impedance matched to the cable 9 (Figure 1) connected to the connector 430 and also impedance matched to the loop 431.

25 The extension device 402 also comprises means 439 for delivering power to/from a mobile terminal 6. The power delivering means 439 is in one embodiment of the invention in the form of a power supply connector and is configured to be releasably attached or connected to the power supply connector 26 (Figure 2). The extension device 402 also comprises means 438 for controlling power supply to the  
30 LNA 432 for example in the form of a switch. Power lines are shown as short dashed lines and control/signal lines are shown as long dashed lines.



The extension device 402 further comprises means 440 for receiving power from an external power source in the form of a power supply connector, means 441 for charging a rechargeable battery in the form of a circuit including a transformer (not shown), rectifier (not shown) and controller (not shown), means 442 for storing  
5 power in the form of a rechargeable battery and means 443 for controlling power in the form of a switch. The charging means 441 may be used to charge the battery 442 in the extension device 442 and/or the battery 24 (Figure 2) in the mobile terminal 6. When the extension device 402 is connected to an external power source (not shown), charging means 441 charges battery 442 until it is full.

10

Preferably, the extension device 402 is arranged as a cradle for receiving mobile terminal 6 as shown in Figure 4.

In use, the extension device 402 operates substantially similar to extension device  
15 302. However, power need not be supplied by the mobile terminal 6. Nevertheless, power supply to the LNA 432 may still be controlled by the mobile terminal 6 through switch 438.

If the extension device 402 is connected to an external power source (not shown),  
20 the LNA 432 can be powered by the external source (not shown), preferably under the control of the processor 12 (Figure 2) using switch 438. If the LNA 432 is not being powered, then the power can be used to charge battery 24 (Figure 2).

If the extension device 402 is disconnected from the external power source (not  
25 shown), the LNA 432 can be powered by battery 442, preferably under the control of the processor 12 (Figure 2).

If the extension device 402 is disconnected from the external power source (not shown) and there is insufficient power stored in battery 442, the LNA 432 can be  
30 powered by battery 24 (Figure 2).

*Sixth embodiment*

Referring to Figure 9, a sixth embodiment of an extension device 502 according to the present invention is shown.

- 5 The extension device 502 is similar to the extension device 402 described earlier differing in that it can transmit a more powerful signal, which can be controlled according to whether the device 502 and the mobile terminal 6 are connected.

10 The extension device 530 comprises means 530 for receiving a signal received via an antenna in the form of a connector for receiving a corresponding connector (not shown) at the end of the cable 9 (Figure 1), optional first means 532 for amplifying the signal in the form of a wideband UHF low noise amplifier (LNA), a second means 534 for amplifying the signal in the form of a wideband power amplifier, means 531 for transmitting the amplified signal to the mobile terminal by inductive  
15 coupling in the form of loop and means 544 for switching the output of the LNA 532 either directly to the loop 531 or via the power amplifier 534. Instead of being connected to the loop 531, the power amplifier 534 may be connected to a radiating antenna (not shown). The extension device 502 further comprises means 537 for detecting whether the mobile terminal 6 is attached to or located within a  
20 predetermined distance of the extension device 502 and for controlling switch 544. The detecting means 537 is preferably in the form of a switch or electrical contact. Thus, if the detecting means 537 senses that the mobile terminal 6 is attached to the extension device 502, then it causes the switch 544 to switch the output of the LNA 532 directly to the loop 531 so as to by-pass the power amplifier 534. This limits  
25 the power delivered to the mobile terminal 6 and so helps to prevent saturation of amplifiers and/or other circuits.

The extension device 502 also comprises means 539 for delivering power to/from a mobile terminal 6. The power delivering means 539 is in one embodiment of the  
30 invention in the form of a power supply connector and is configured to be attached to the power supply connector 26 (Figure 2). The extension device 502 also comprises means 538 for controlling power supply to the amplifiers 532, 534 for

example in the form of a switch. Power lines are shown as short dashed lines and control lines are shown as long dashed lines.

5 The extension device 502 further comprises means 540 for receiving power from an external power source in the form of a power supply connector, means 541 for charging a rechargeable battery in the form of a circuit including a transformer (not shown), rectifier (not shown) and controller (not shown), means 542 for storing power in the form of a rechargeable battery and means 543 for controlling power in the form of a switch. The charging means 541 may be used to charge the battery  
10 542 in the extension device 502 and/or the battery 24 (Figure 2) in the mobile terminal 6, in a manner similar to that described in relation to extension device 402.

Preferably, the extension device 502 is arranged as a cradle for receiving mobile terminal 6 as shown in Figure 4.

15 In use, the extension device 502 operates substantially similar to extension device 402. However, as explained earlier, if the mobile terminal 6 is connected to the extension device 502, for example by being placed in the cradle and switch 537 is actuated, then it causes switch 544 to by-pass the power amplifier 534, thereby  
20 limiting the power delivered to the mobile terminal 6. Other arrangements may be used instead of by-passing the amplifier 534. Instead, the power amplifier 534 may be disabled or set to unity gain.

The LNA 532 may be omitted. Thus, the signal may be fed directly into the loop  
25 531 so as to by-pass the power amplifier 534.

The LNA 532 and power amplifier 534 are preferably impedance matched to elements 530, 544, 531 to which they are connected. The LNA 532 is preferably impedance matched to the cable 9 connected to the connector 530.

30

#### *Seventh embodiment*

Referring to Figure 10, a seventh embodiment of an extension device 602 according to the present invention is shown.

In previous embodiments, substantially all signals received by an extension device are amplified and re-transmitted. In this embodiment, a signal can be selectively amplified and re-transmitted.

5

The extension device 602 comprises means 630 for receiving a signal received via an antenna in the form of a connector for receiving a corresponding connector (not shown) at the end of the cable 9 (Figure 1), means 645 for filtering a signal, preferably in the form of a tuneable tracking filter, optional means 632 for  
10 amplifying a signal in the form of a wideband UHF low noise amplifier (LNA), means 634 for amplifying the signal in the form of a wideband power amplifier, means 631 for transmitting the amplified signal to the mobile terminal 6 by inductive coupling in the form of a loop and means 644 for switching the output of the LNA 632 either directly to the loop 631 or via the power amplifier 634. Instead  
15 of being connected to the loop 631, the power amplifier 634 may be connected to a radiating antenna (not shown). The extension device 602 comprises means 637 for detecting whether the mobile terminal 6 is attached to or located within a predetermined distance of the extension device 602 and for controlling switch 644. The detecting means 637 is preferably in the form of a switch or electrical contact.  
20 Thus, if the detecting means 637 senses that the mobile terminal 6 is attached to the extension device 602, then it causes the switch 644 to switch the output of the LNA 632 directly to the loop 631 (or other antenna) so as to by-pass the power amplifier 634 and thereby limit the power delivered to the mobile terminal 6 thus preventing saturation of amplifiers and/or other circuits. Power lines are shown as short  
25 dashed lines and control lines are shown as long dashed lines.

The extension device 602 also comprises means 639 for delivering power to/from a mobile terminal 6. The power delivering means 639 is in one embodiment of the invention in the form of a power supply connector and is configured to be attached  
30 to the power supply connector 26 (Figure 2). The extension device 602 also comprises means 638 for controlling power supply to the amplifiers 632, 634, the filter 645 and other units 646, 647, 648, 649, preferably in the form of a switch.

Power lines are shown as short dashed lines and control lines are shown as long dashed lines.

The extension device 602 further comprises means 640 for receiving power from an external power source in the form of a power supply connector, means 641 for  
5 charging a rechargeable battery in the form of a circuit including a transformer (not shown), rectifier (not shown) and controller (not shown), means 642 for storing power in the form of a rechargeable battery and means 643 for controlling power for example in the form of a switch. The charging means 641 may be used to  
10 charge the battery 642 in the extension device 602 and/or the battery 24 (Figure 2) in the mobile terminal 6, in a manner similar to that described in relation to extension device 402.

The extension device may optionally comprise means 646 for controlling the band  
15 pass filter, e.g. in the form of a processor, means 647 for interfacing with a user including a number of buttons (not shown), means 648 for storing data, such as memory, and means 649 for interfacing wirelessly over a short range for example in the form a Bluetooth™ transceiver.

20 Preferably, the extension device 602 is arranged as a cradle for receiving mobile terminal 6 as shown in Figure 4.

In use, the user can select a given signal, which can be referred to as a channel, via user interface 647 or via a mobile terminal 6 via Bluetooth™ transceiver 29 (Figure  
25 2). The processor 646 causes the tuneable tracking filter to select signal 7 in preference to other received signals (not shown). Thereafter, the extension device 602 operates substantially similar to extension device 502.

The signal filtering means 645 may be a complete UHF tuner in which signal 7 is  
30 converted into an intermediate frequency (IF) and re-converted back to the original frequency. The signal filtering means 645 may be fixed.

*Eighth embodiment*

Referring to Figure 11, an eighth embodiment of an extension device 702 according to the present invention is shown.

5 The extension device 702 comprises means 730 for receiving a signal received via an antenna in the form of a connector for receiving a corresponding connector (not shown) at the end of the cable 9 (Figure 1), means 745 for filtering a signal, preferably in the form of a tuneable tracking filter, means 750 for down-converting from a first frequency to an intermediate frequency and up-converting to a second  
10 frequency, optional means 732 for amplifying a signal in the form of a wideband UHF low noise amplifier (LNA), means 734 for amplifying the signal in the form of a wideband power amplifier, means 731 for transmitting the amplified signal to the mobile terminal 6 by inductive coupling in the form of loop and means 744 for switching the output of the LNA 732 either directly to the loop 731 or via the  
15 power amplifier 734. Instead of being connected to the loop 731, the power amplifier 734 may be connected to a radiating antenna (not shown). The extension device 702 comprises means 737 for detecting whether the mobile terminal 6 is attached to or located within a predetermined distance of the extension device 702, such as a switch or electrical contact, and for controlling switch 744. Thus, if the  
20 detecting means 737 senses that the mobile terminal 6 is attached to the extension device 702, then it causes the switching means 744 to switch the output of the LNA 732 directly to the loop 731 so as to by-pass the power amplifier 734 and thereby limit the power delivered to the mobile terminal 6 thus preventing saturation of amplifiers and/or other circuits.

25

The extension device 702 also comprises means 739 for delivering power to/from a mobile terminal 6. The power delivering means 739 is in one embodiment of the invention in the form of a power supply connector and is configured to be attached to the power supply connector 26 (Figure 2). The extension device 702 also  
30 comprises means 738 for controlling power supply to the amplifiers 732, 734, the filter 745, up/down converter 750 and other units 746, 747, 748, 749, in the form of a switch. Power lines are shown as short dashed lines and control lines are shown as long dashed lines.

The extension device 702 further comprises means 740 for receiving power from an external power source in the form of a power supply connector, means 741 for charging a rechargeable battery in the form of a circuit including a transformer (not shown), rectifier (not shown) and controller (not shown), means 742 for storing power in the form of a rechargeable battery and means 743 for controlling power for example in the form of a switch. The charging means 741 may be used to charge the battery 742 in the extension device 702 and/or the battery 24 (Figure 2) in the mobile terminal 6, in a manner similar to that described earlier.

10

The extension device may optionally comprise means 746 for controlling the band pass filter 745 and up/down converter 750 in the form of a processor, means 747 for interfacing with a user including a number of buttons (not shown), means 748 for storing data, such as memory, and means 749 for interfacing wirelessly over a short range for example in the form a Bluetooth™ transceiver. This allows a user to select an alternate frequency for re-transmission.

15

Preferably, the extension device 702 is arranged as a cradle for receiving mobile terminal 6 as shown in Figure 4.

20

In use, the extension device 702 operates substantially similar to extension device 602 described earlier. However, not only is it possible to select a given frequency, but also to up or down convert to another frequency.

25

From reading the present disclosure, other variations and modifications will be apparent to persons skilled in the art. Such variations and modifications may involve equivalent and other features which are already known and may be used instead of or in addition to features already described herein. Furthermore, any feature used in one embodiment may be used in another embodiment.

30

Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present invention also includes any novel features or any novel combination of features

disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to  
5 such features and/or combinations of such features during the prosecution of the present application or of any further application derived therefrom.



## Claims

1. An extension device for delivering a digital broadcast to a mobile terminal,  
the device comprising:  
5 means for receiving a signal carrying the digital broadcast received via an  
antenna; and  
a loop or coil configured to couple inductively with a corresponding loop or  
coil included in the mobile terminal so as to transmit the signal to the mobile  
terminal.  
10
2. An extension device according to claim 1, further comprising:  
means for amplifying the signal.
3. A device according to claim 2, wherein:  
15 said amplifying means is powered by the mobile terminal.
4. A device according to claim 2 or 3, wherein:  
said amplifying means is controlled by the mobile terminal.
- 20 5. A device according to claim 4, wherein:  
said amplifying means intermittently operates under the control of the  
mobile terminal.
6. A device according to any one of claims 2 to 5, comprising:  
25 means for detecting a position of the mobile terminal; and  
means for controlling operation of said amplifying means in dependence  
upon the position of the mobile terminal.
7. A device according to claim 6, wherein:  
30 said detecting device comprises a switch to determine whether the mobile  
terminal is attached to the extension device.

8. A device according to claim 6, wherein:

said detecting device comprises means for sensing whether the mobile terminal is located within a predetermined distance of the extension device.

5 9. A device according to any one of claims 6 to 8, wherein:

said controlling means causes said amplifying means to reduce gain when the mobile terminal is in a given position.

10. A device according to any one of claims 6 to 8, wherein:

10 said controlling means causes said amplifying means to be by-passed when the mobile terminal is in a given position.

11. A device according to any one of claims 6 to 8, comprising:

15 an antenna for receiving an amplified signal from the amplifying means and radiatively transmitting the amplified signal to the mobile terminal; wherein

said controlling means causes the signal to be routed to the loop or coil when the mobile terminal is in a given position and to be routed to the amplifying means when not.

20 12. A device according to any preceding claim, further comprising:

means for filtering said signal from at least one other signal.

13. A device according to any preceding claim, comprising:

means for receiving power from an external source; and

25 means for delivering power to the mobile terminal to permit recharging of a rechargeable battery included in the mobile terminal.

14. A device according to any preceding claim, wherein the loop or coil is a loop and the loop is arranged substantially around a perimeter of a face of the device.

30



15. A device according to any preceding claim, wherein the loop or coil has an area of between 10 and 50 cm<sup>2</sup>.

16. A device according to any preceding claim which is adapted to be placed on a piece of furniture.
17. A device according to any preceding claim, further comprising:  
5 an antenna mounted on a roof or to an externally facing side of an external wall of a building.
18. An extension device for delivering a digital broadcast to a mobile terminal substantially as hereinbefore described with reference to Figures 1, 2 and 4 and any  
10 one of Figures 3, 5, 6, 7, 8, 9, 10 or 11 of the accompanying drawings.
19. An extension device for delivering a digital broadcast to a mobile terminal, the device comprising:  
an input for receiving a signal carrying the digital broadcast received via an  
15 antenna; and  
a loop or coil configured to couple inductively with a corresponding loop or coil included in the mobile terminal so as to transmit the signal to the mobile terminal.
20. Apparatus for receiving a time-sliced digital broadcast comprising:  
an extension device according to any preceding claim; and  
a mobile terminal including a loop or coil for receiving the signal from the extension device.
21. Apparatus according to claim 20, wherein the mobile terminal causes said amplifying means to operate when reception of a time slice is expected.
22. A method of delivering a digital broadcast to a mobile terminal, the method comprising:  
30 receiving a signal carrying a digital broadcast; and  
providing said signal to a loop or coil configured to couple inductively with a corresponding loop or coil included in the mobile terminal so as to transmit the signal to the mobile terminal.

## Abstract

### Extension Device

5 An antenna (8), mounted to a roof (3) of a building (1), receives digital broadcast transmissions and feeds a signal through a cable (9) to a desk stand (2). The desk stand has an amplifier and a loop antenna. A mobile telephone handset (6) capable of receiving digital broadcast transmissions also includes a loop antenna. Using inductive coupling, the signal is transmitted from the desk stand to the mobile telephone handset.

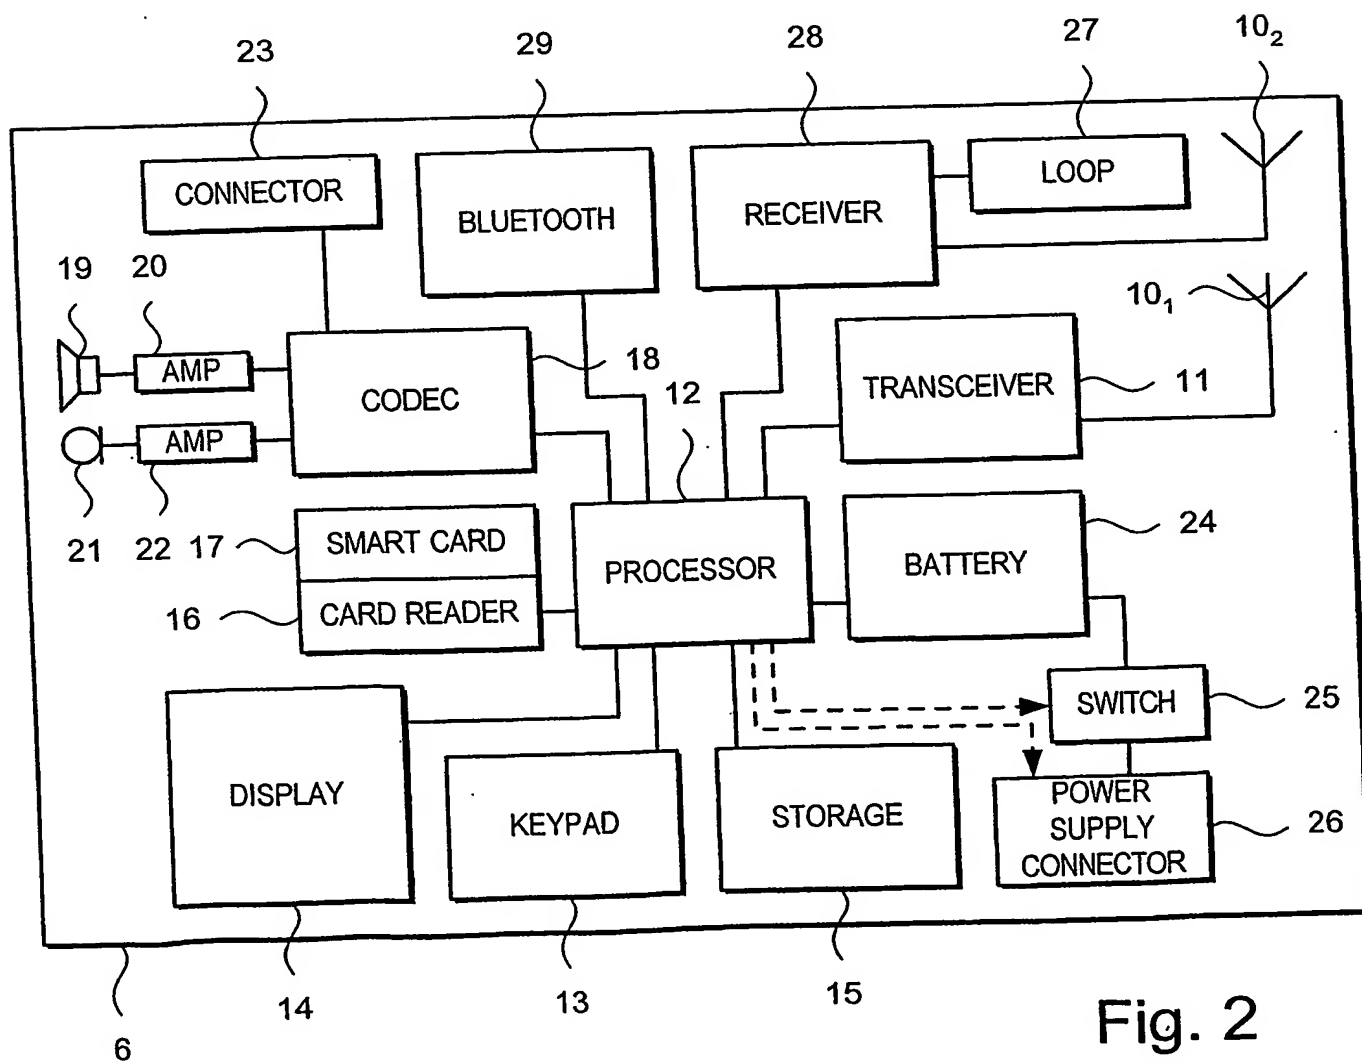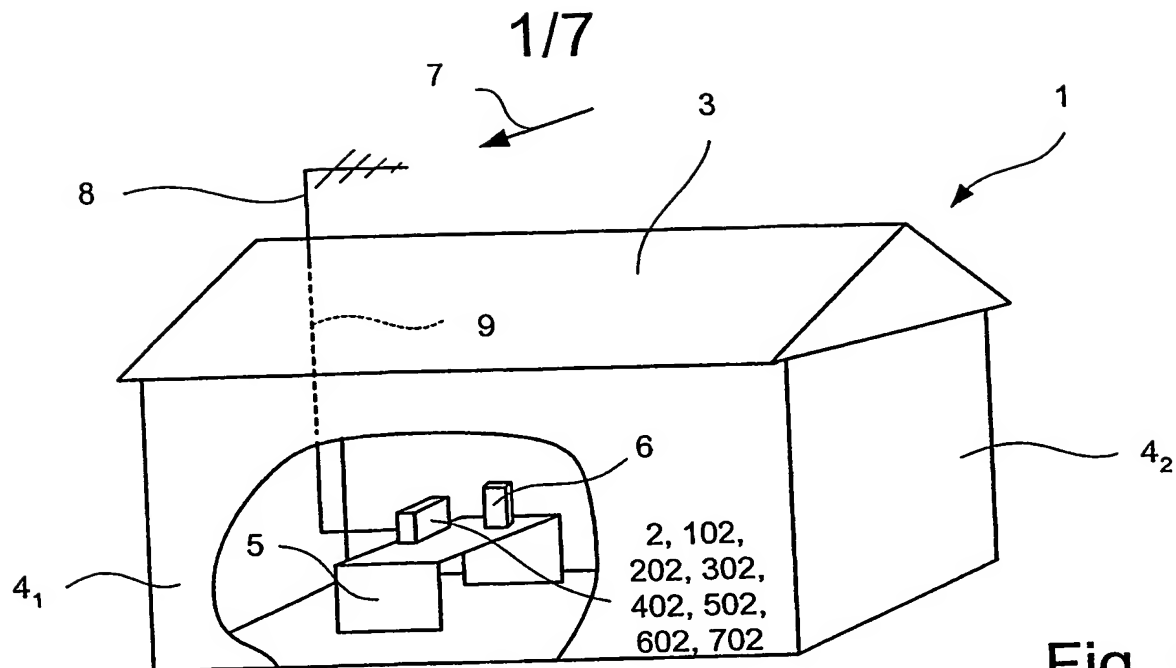

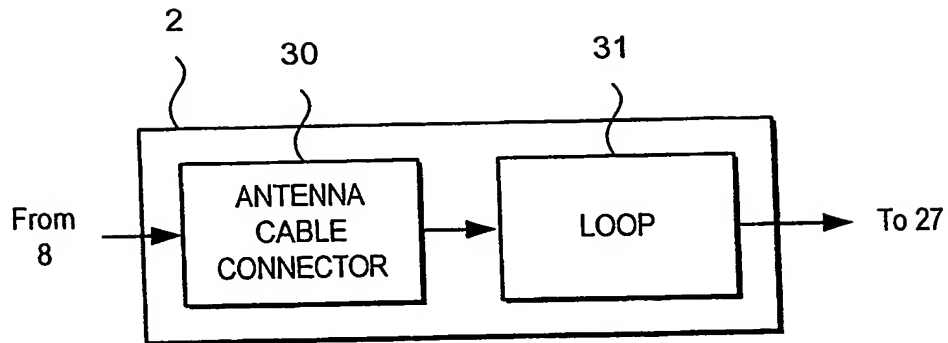


Fig. 3

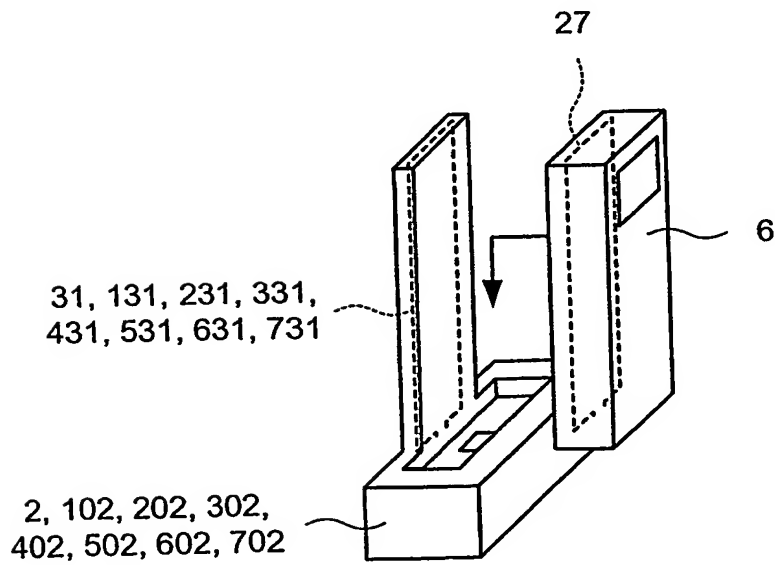


Fig. 4

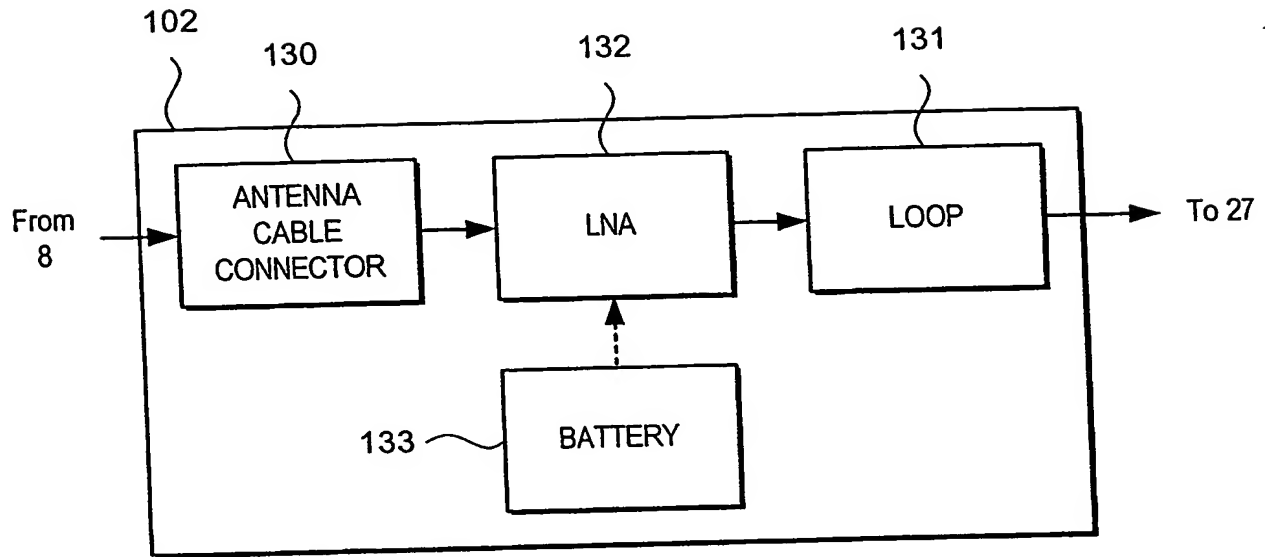


Fig. 5

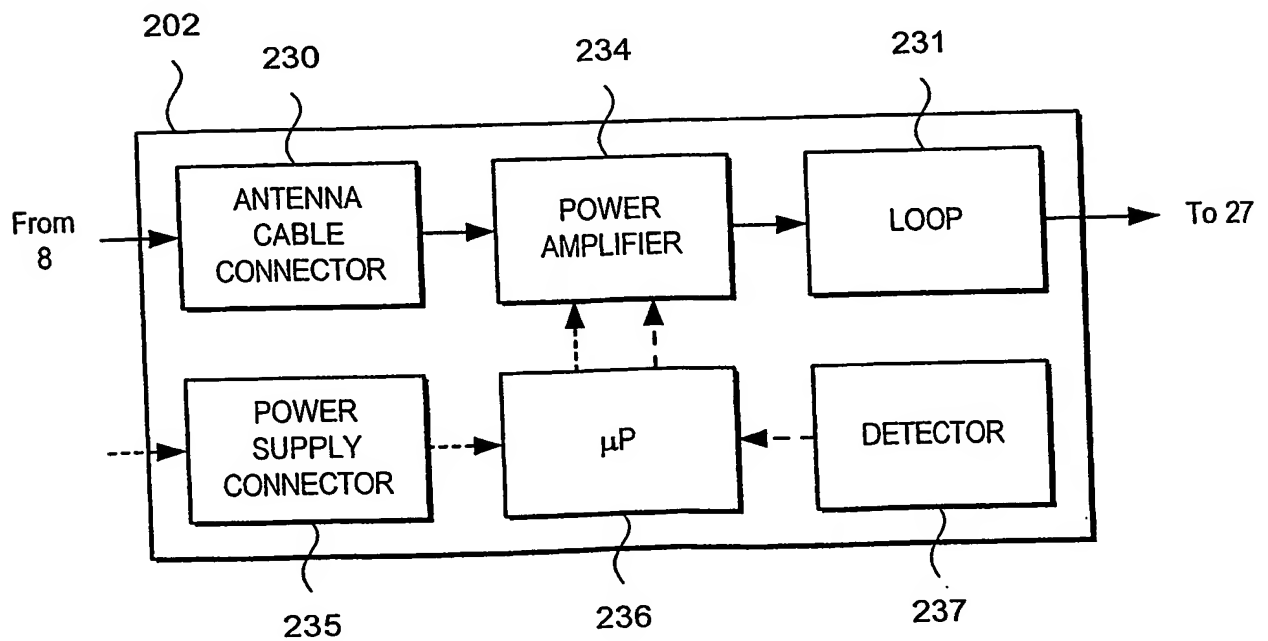


Fig. 6

4/7

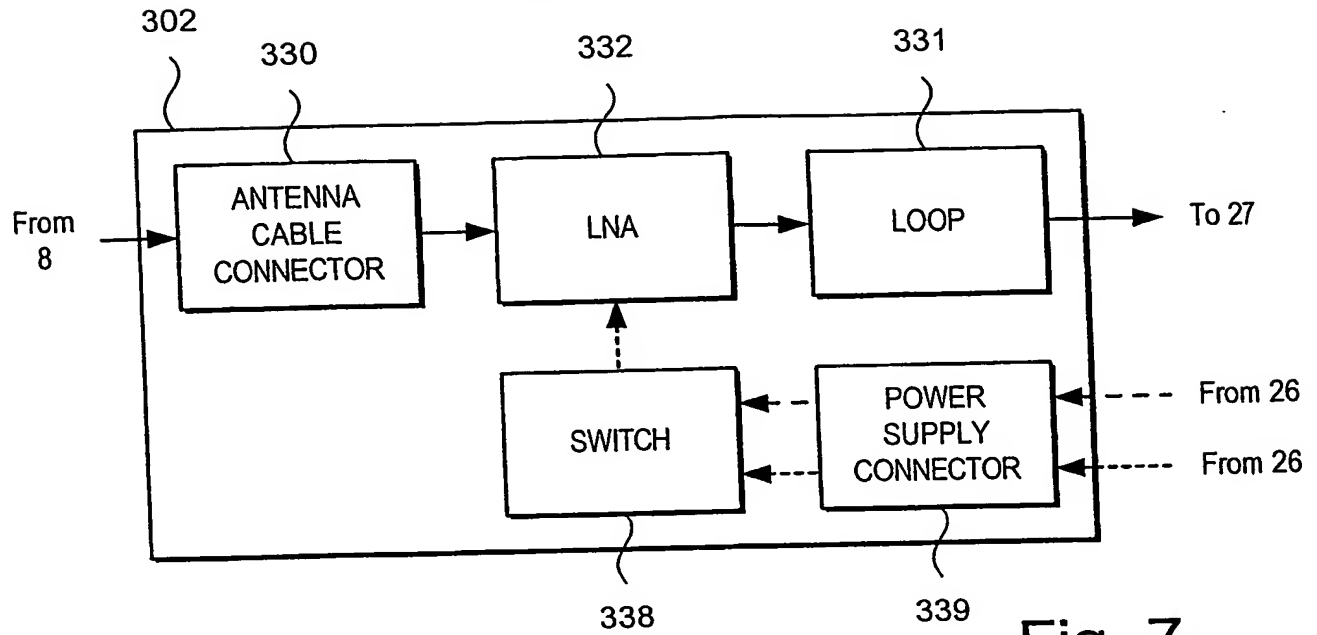


Fig. 7

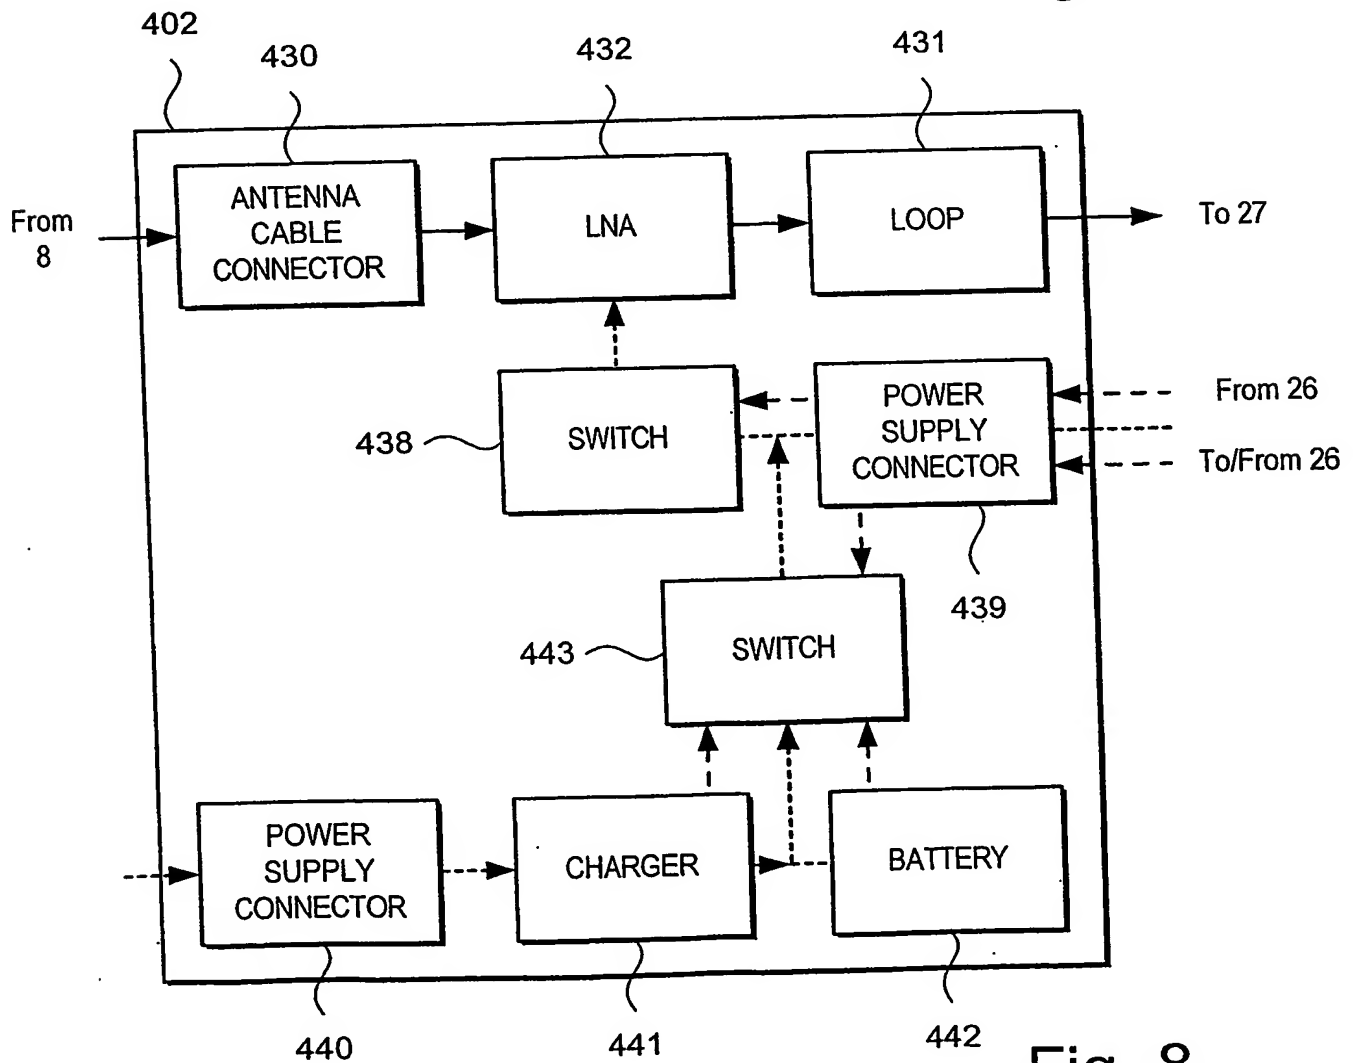


Fig. 8



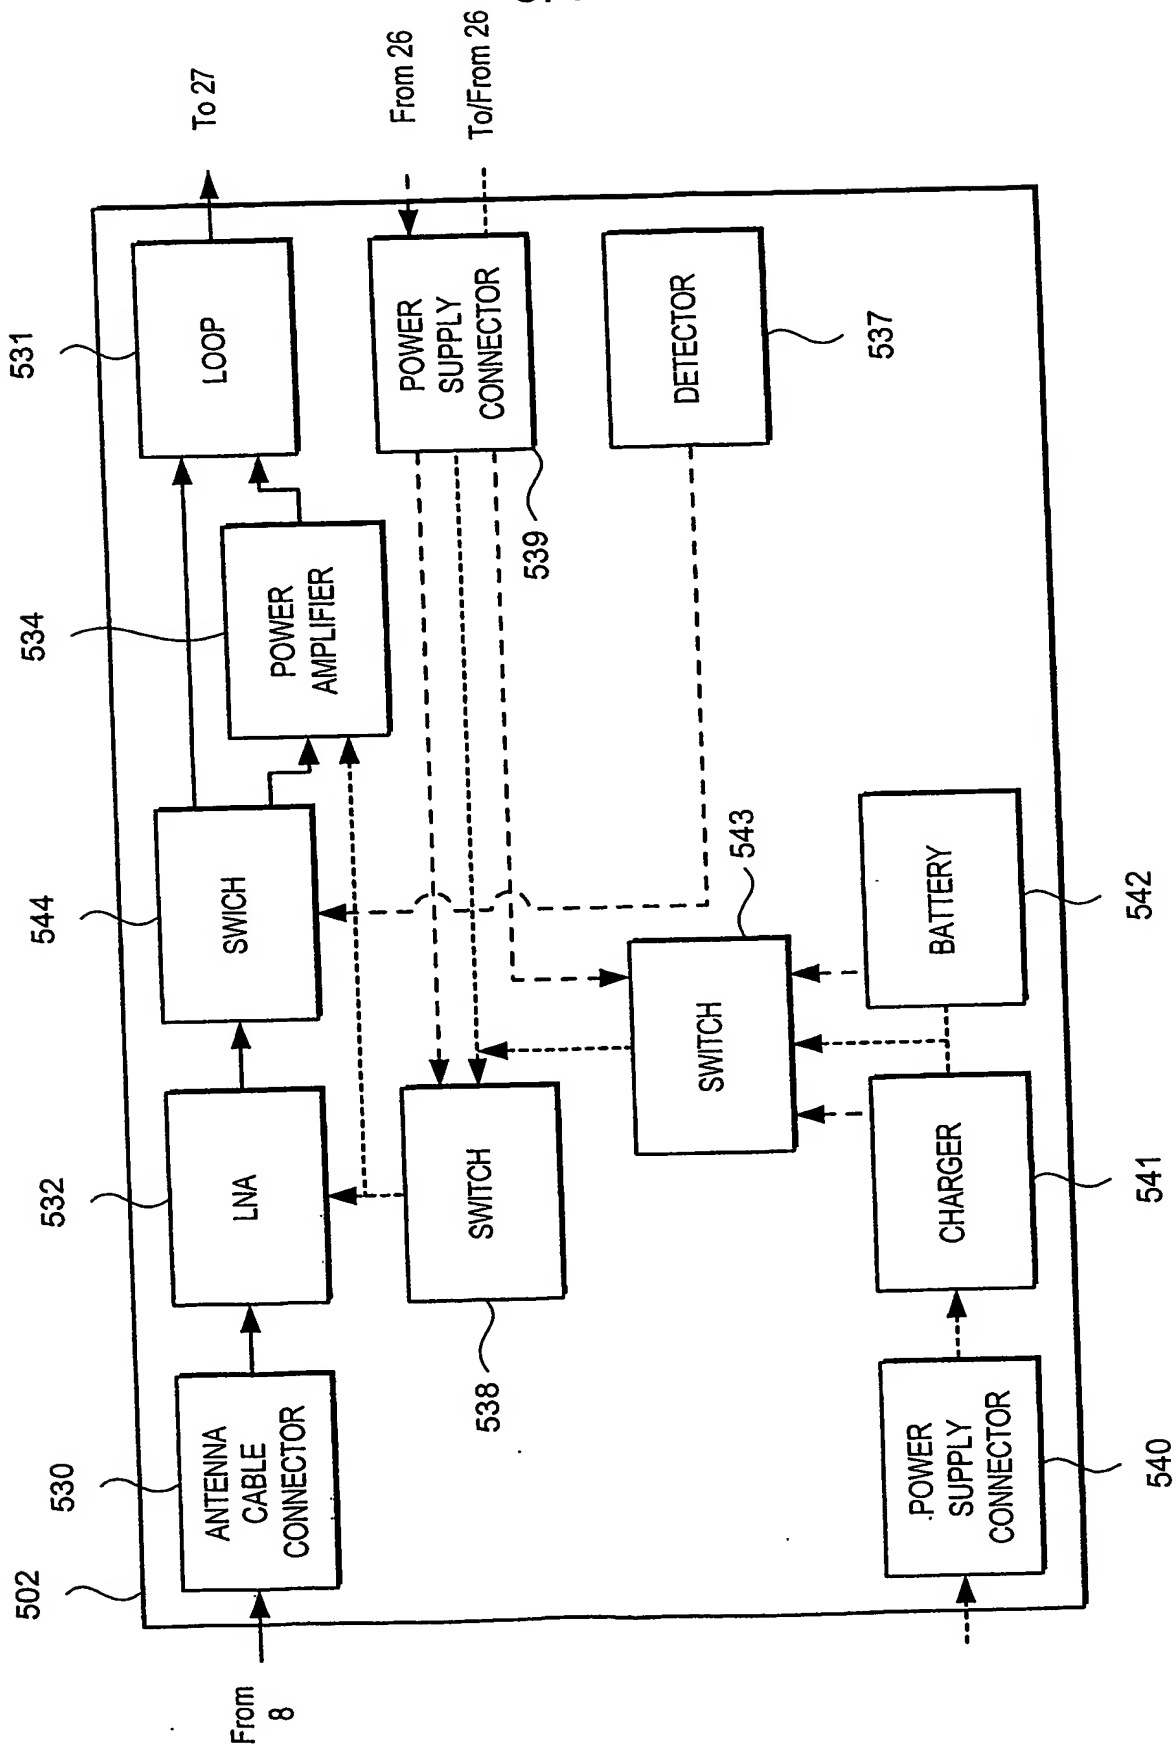


Fig. 9

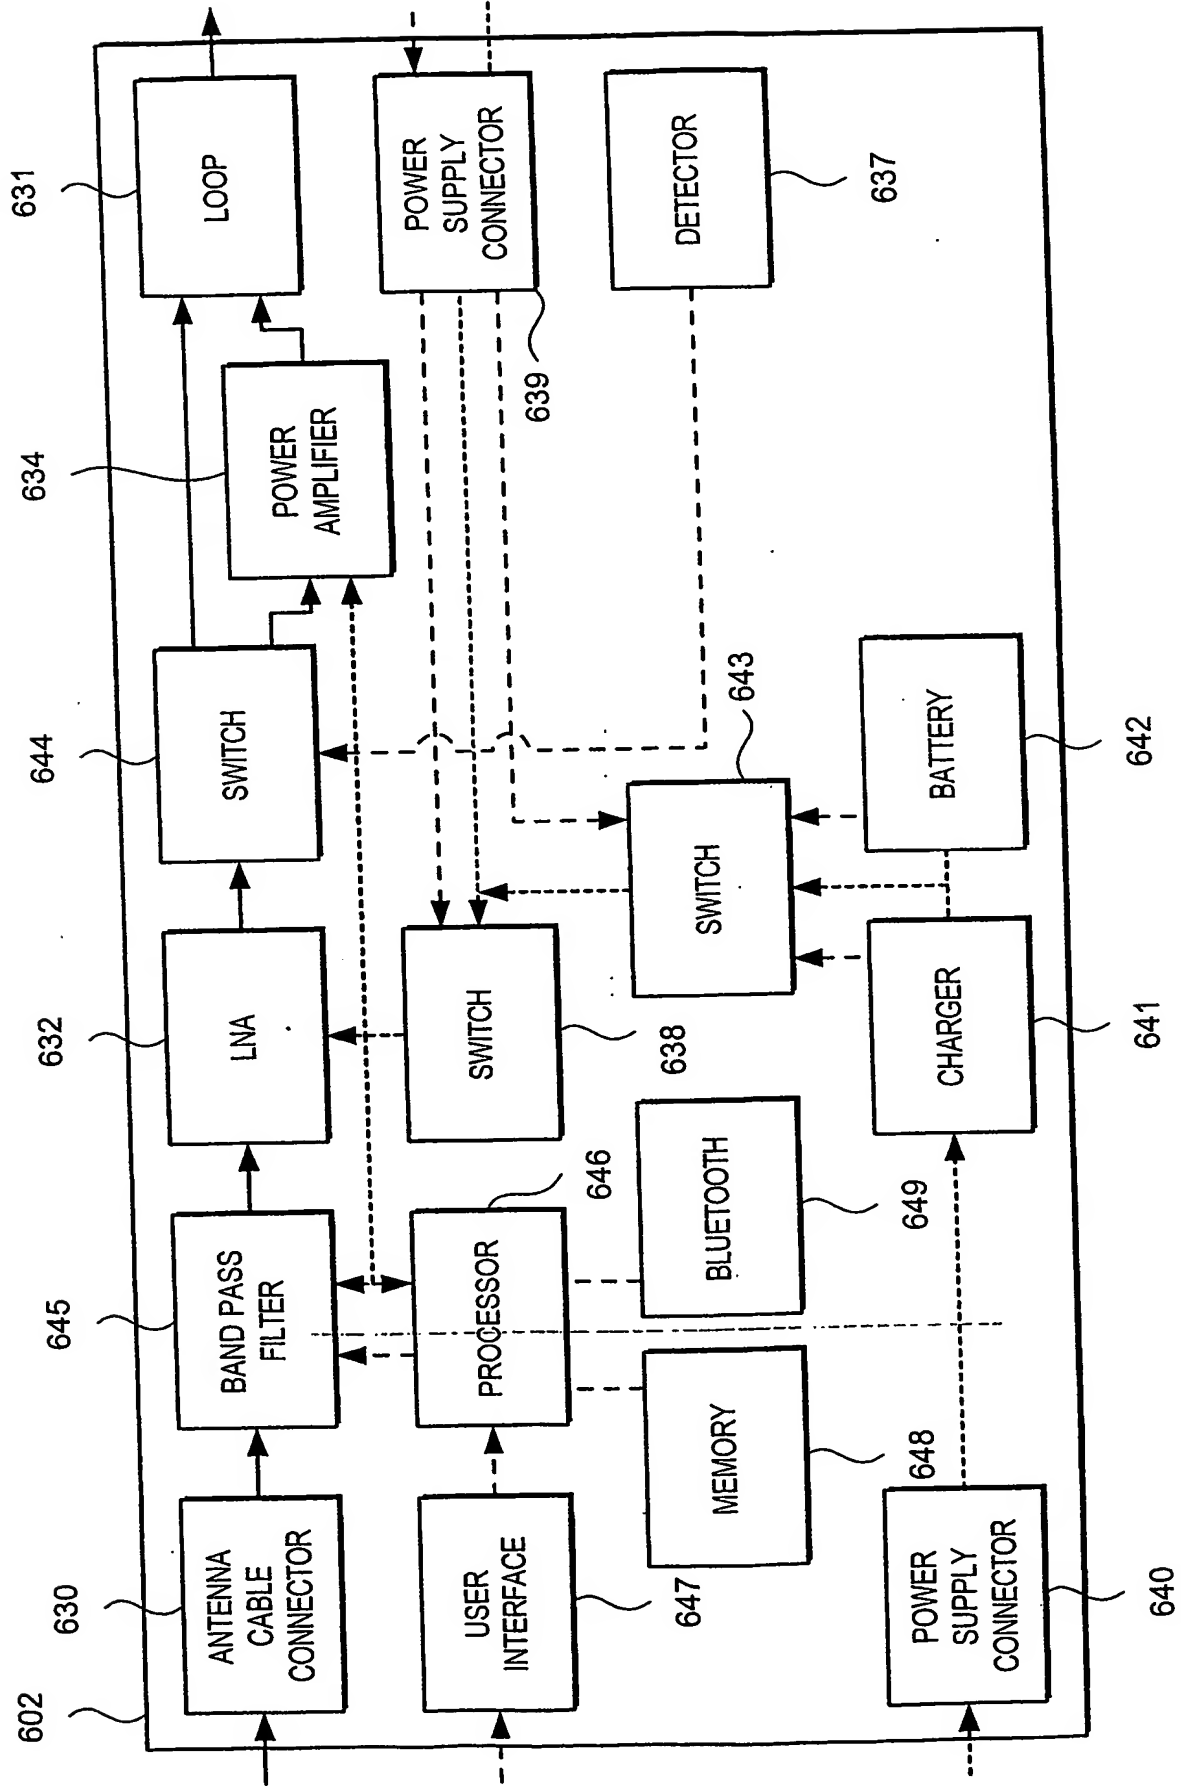


Fig. 10

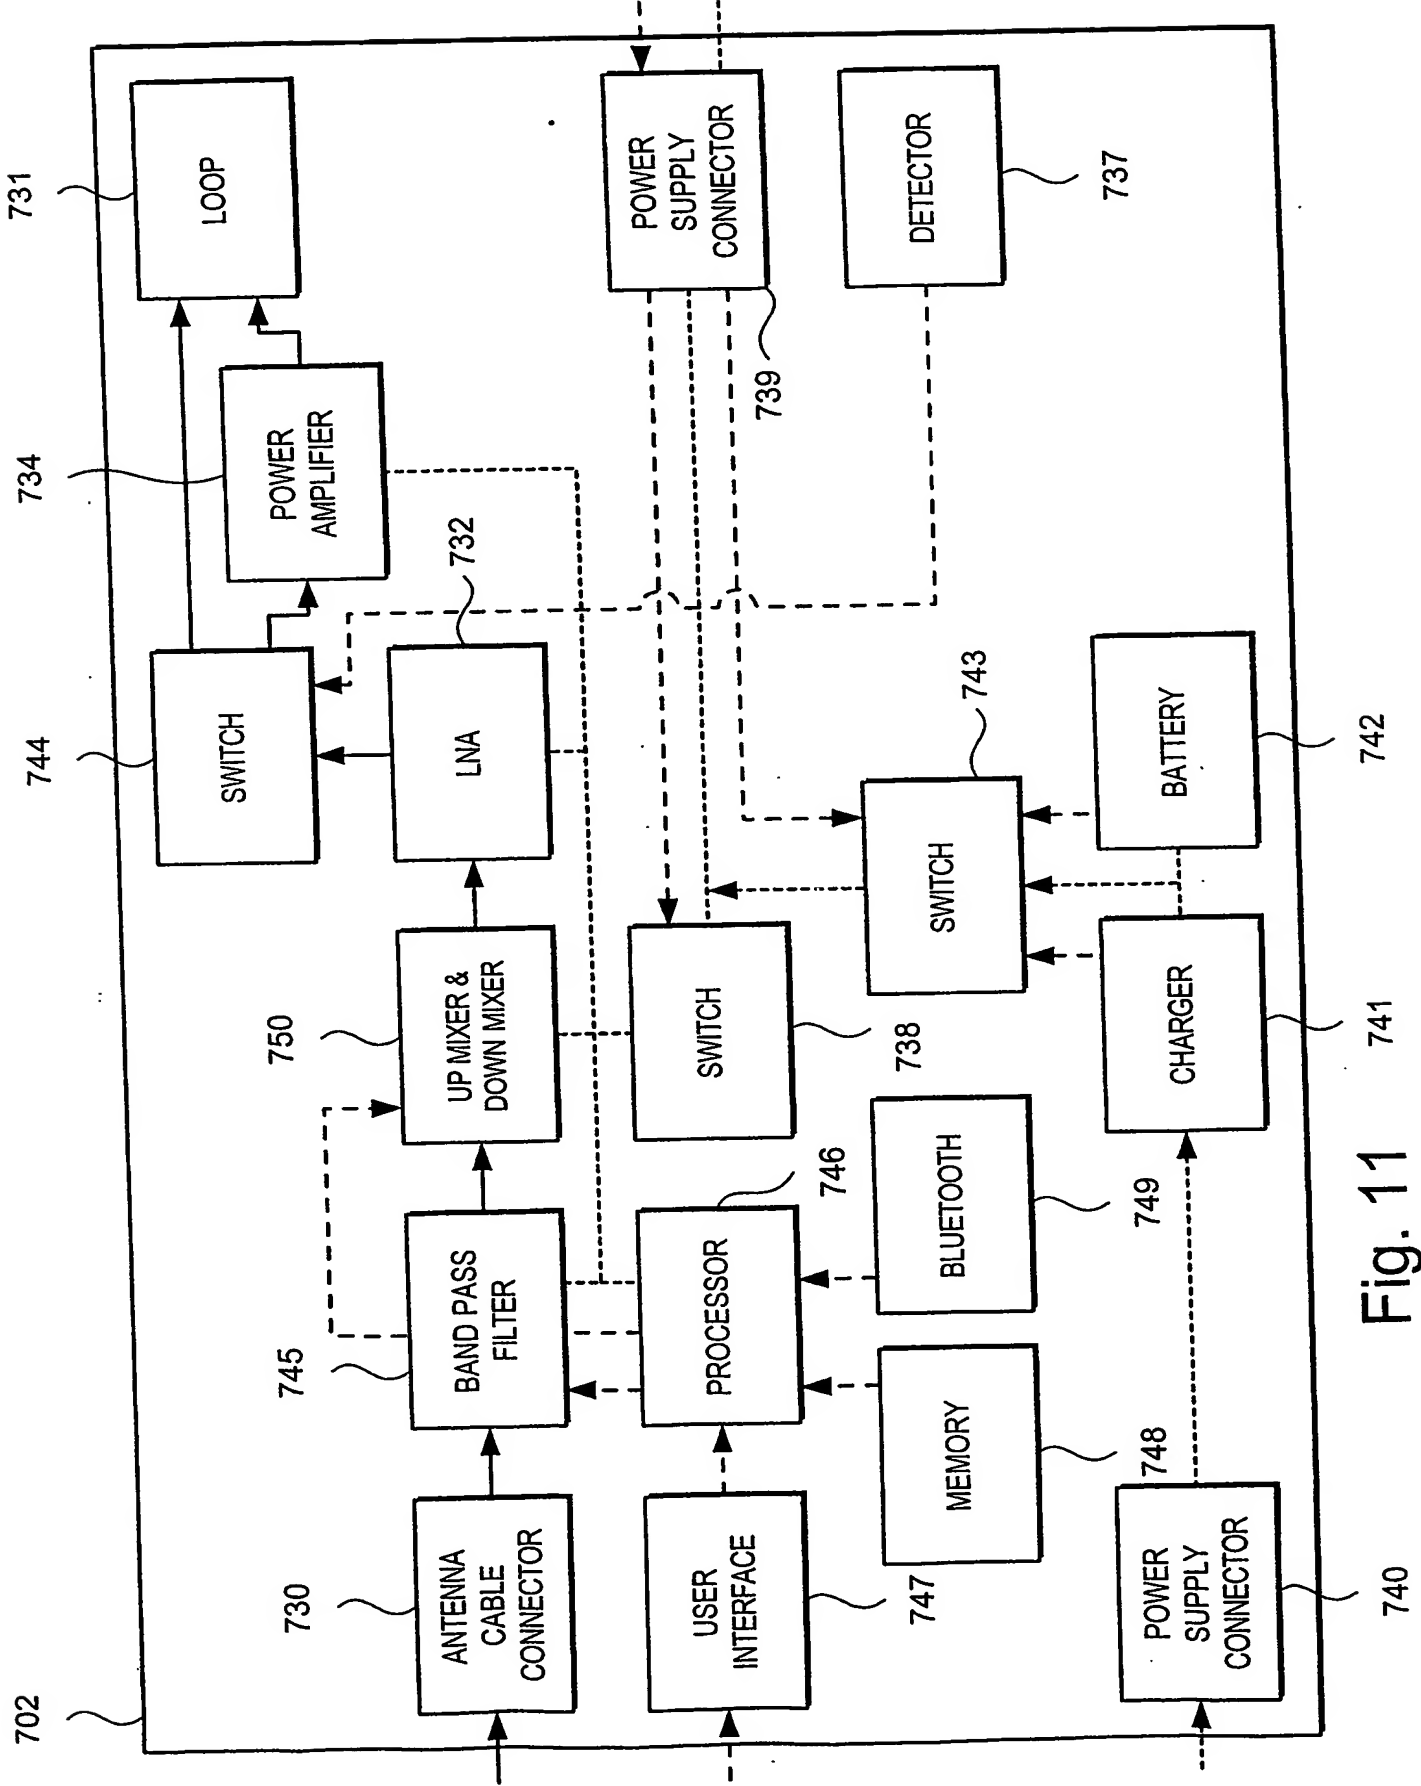


Fig. 11

PCT/IB2004/051829



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☒ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☒ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**